


FILTER STRIP, REINFORCED

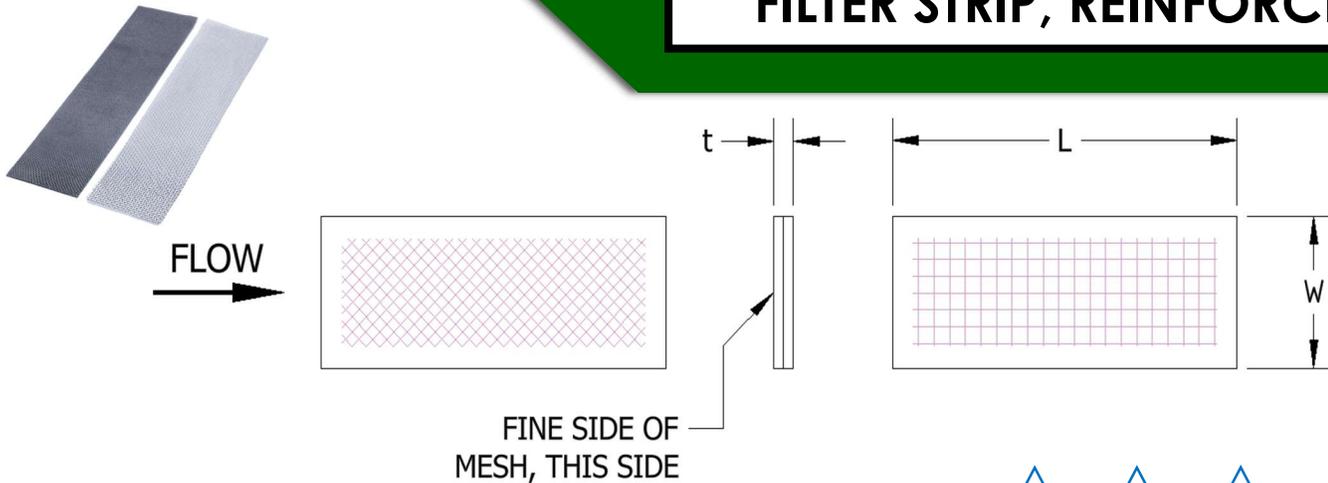

PART NUMBER DEFINITION: 84805 - 1 - 2 - 3

- ADD "P" FOLLOWING MAIN PART NUMBER (84805P) FOR PASSIVATION
- STANDARD PASSIVATION: AMS 2700, METHOD 1, TYPE 2, CLASS 2
- MATERIAL: CRES PER AMS-QQ-S-763, CHEMICAL COMPOSITION ONLY
- FILTER MEDIUM: FILTER STRIP CAPABLE OF FILTERING LIQUIDS AND GASES
- FILTER MEDIA: SINTERED STAINLESS STEEL WOVEN WIRE MESH
- STANDARD MATERIAL: 304L CRES
- FOR ALTERNATE MATERIAL, CONSULT FACTORY FOR AVAILABILITY

ADDITIONAL PART INFORMATION:

- MICRON RATING VERIFICATION: PARTICLE CONTROL ASSURED BY BUBBLE POINT TEST PER ARP-901 PRIOR TO MANUFACTURING (AT RAW MESH LEVEL)
- STRIPS ARE ULTRASONICALLY CLEANED AND BULK PACKAGED IN SEALED PLASTIC BAGS
- NOMINAL FILTER STRIP THICKNESS MAY VARY

PLEASE NOTE:

- ADDITIONAL NON-STANDARD STRIP SIZES AVAILABLE, CONTACT OUR SALES DEPARTMENT FOR ASSISTANCE
 - ANY MODIFICATIONS TO STANDARD PART WILL BE RECLASSIFIED AS A CUSTOM PART, REQUIRING A UNIQUE PART NUMBER
 - CHECK FACTORY FOR LEAD TIME AND AVAILABILITY

PART NUMBER EXAMPLES: 84805-17-1.000-.500 OR 84805P-40-.625-.450

Micron 1	Length* 2 L	Width* 3 W	Nominal Strip Thickness t	When Filtering Liquids		When Filtering Gasses	
				Nominal Micron 98% Removal	Absolute Micron 100% Removal	Nominal Micron 98% Removal	Absolute Micron 100% Removal
02	STANDARD LENGTH STRIP SIZES .500-12.000"	STANDARD WIDTH STRIP SIZES .250-6.000"	.030"	2	15	1	9
05			5	18	3.5	13	
10			10	25	6	18	
17			17	45	11	25	
40			40	65	30	55	
70			70	105	50	85	
105			105	150	85	130	
145			145	205	120	175	
250			250	350	200	300	

*LENGTH / *WIDTH TOLERANCE: IF THE LENGTH OR WIDTH DIMENSION IS LESS THAN OR EQUAL TO 3.000", TOLERANCE IS ± .010; IF GREATER THAN 3.000", TOLERANCE IS ± .020

Ejay Filtration, Inc.
<https://www.ejayfiltration.com/>

NOTE: ENGINEERING ASSISTANCE AVAILABLE