




84802 Filter Insert, Standard

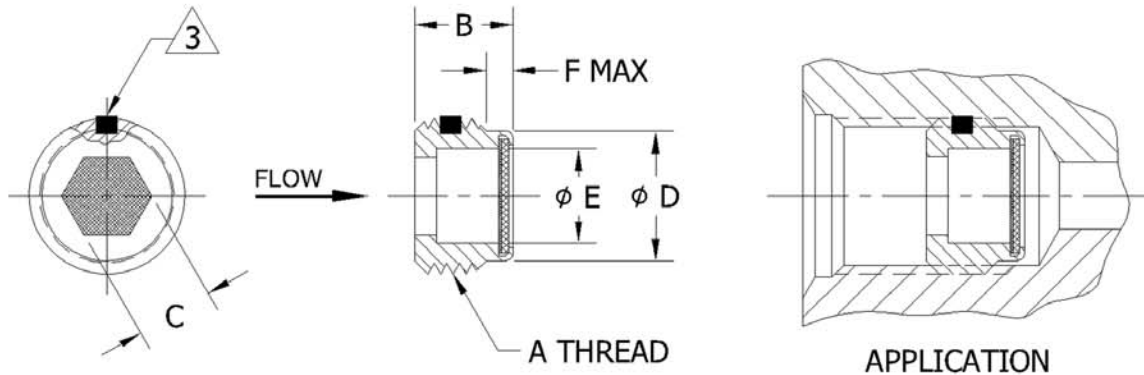

Part Number Definition: 84802- $\triangle 1$ - $\triangle 2$ - $\triangle 3$ -(matl)

Standard Material: 304 CRES, Alt Material Availability: 304L, 316, 316L, 347

Add "P" following main part number for passivation per AMS 2700

Add "SP" following main part number for all other passivation requirements

Part Number Examples: 84802P-4-40-TLN-316L • 84802-4-40-TLP

Dash No $\triangle 1$	Tube OD	A UNF-3A THD	B $\pm .01$	C HEX	D $\pm .005$	E $\pm .005$	F $\pm .01$
3	.187"	.3750-24	.21"	.187"	.313"	.22"	.06"
4	.250"	.4375-20	.27"	.219"	.365"	.27"	.07"
5	.312"	.5000-20	.27"	.250"	.427"	.33"	.07"
6	.375"	.5265-18	.29"	.312"	.482"	.39"	.08"
8	.500"	.7500-16	.33"	.375"	.659"	.56"	.09"
10	.625"	.8750-14	.36"	.500"	.772"	.67"	.10"
12	.750"	1.0625-12	.43"	.625"	.945"	.84"	.11"

Alternate Configurations and Engineering Assistance Available

Micron $\triangle 2$	When Filtering Liquids	
	Nominal Micron 98% Removal	Absolute Micron 100% Removal
2	2	15
5	5	18
10	10	25
17	17	45
40	40	70
70	70	105
105	105	150
145	145	205

$\triangle 3$ Optional Thread Locking Per NAS 1238	-TLN = Nylok Pellet	-TLP = Spray Patch
--	---------------------	--------------------